Tutte Communication ou reproduction de ce document, toute exploitation ou autorisation expresse. Tout manquement à cette règle constitue un abus évident et illicite. Tous droits de propriété industrielle réservés, notamment en matière de brevets et modèles.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Nous permettons ce renseigne à tout ce reproduire ce document, ou utilisez-en toute autre communication écrite. Contravention de ces dispositions entraîne un évidente abus et illicite. Tous droits de propriété industrielle réservés, notamment en matière de brevets et modèles.

Copying of this document and giving it to others and the use or communication thereof, are forbidden without express authority. Contravention of this restriction will constitute an evident abuse and render the author liable for damages. All rights are reserved in the event of the grant of a patent or registration of a utility model or design. This document is the subject of copyright.

il contenuto o mandarlo comunque noto a terzi senza autorizzazione scritta. Ogni infrazione obbliga al risarcimento del danno. Ci riserviamo ogni diritto derivante da brevetti o modelli.

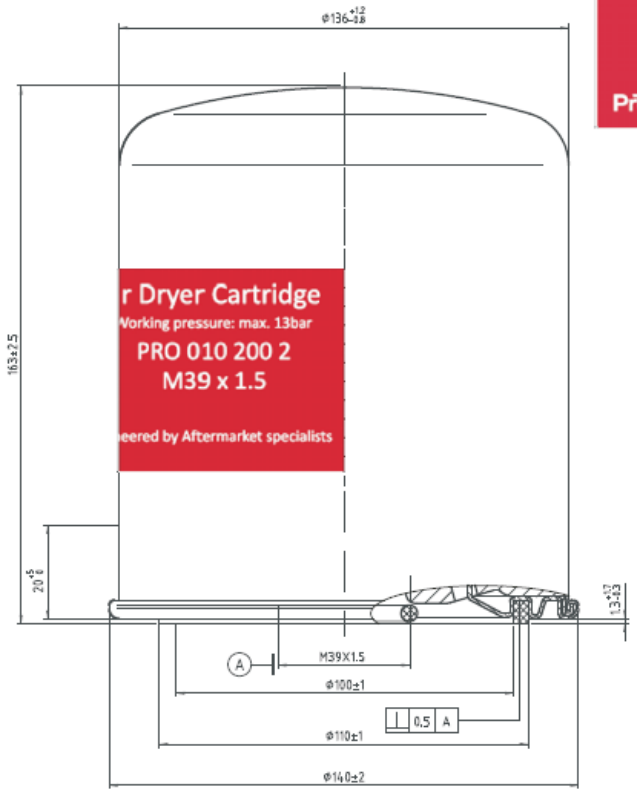

Ⓑ	THERMAL RANGE OF APPLICATION	: -40 C ... +80 C
	WORKING PRESSURE	: MAX. 13 BAR
	TEST PRESSURE ONLINE	: ≥ 6 BAR FOR 15 SEC UNDER WATER
	BURST PRESSURE	: ≥ 23 BAR
	SEALING RING (OUTSIDE)	: NBR 70+5 SHORE A
	PAINTING	: RED INFERIOR SMOOTH (RAL 187)
	LABELLING	: WHITE (RAL 9016)

DELIVERY CONDITIONS	
TO PL10	WITHOUT O-RING
TO DC	WITH ORING AND STICKER

General Specification: JED-334-1 , Size ISO 14405 LP

Further Technical Data:

Doc. Code: Sheet: To

General Tolerances JED-261

Class 1)		Range of Nominal Dimensions (± mm) ≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∢
Fine		0.5	1.0	1.5	2.0	±3°
Medium	X	1.0	2.0	3.0	4.0	
Coarse		2.0	3.5	5.0	6.5	

Tapped Holes acc. StoppedLhole

1) Tolerance Class Applied Crossmarked

Copyright WABCO®

Date	Signature
Drawn	
11-04-2016	BAUT
Checked	
11-04-2016	PRZYBYSZ
Expert	
BAUT	

ProVia

DESICCANT CARTRIDGE

Mass	Scale	Material No.	Date of first issue:		
2.56 KG (B)	-	PRO 010 200 2	Doc.Code	Language	Sheet
			005	EN	1/1
Size	CAD System	EDN-No.	Revision	Techn. Resp.	Replacement for
A 3	CREO	170928	2 x B	5059_AM	-

100mm